

Mechanical Circulatory Support LVAD, RVAD, and Bi-VAD

History

- **SAMPLE**
- Bridge to transplant
- Destination therapy
- Estimated downtime
- LVAD, RVAD, Bi-Vad, TAH
- DNR, MOST, or Living Will
- Contact with LVAD coordinator

Signs and Symptoms

- Unconsciousness
- **Pulseless**
- Apneic
- Poor capillary refill / skin color
- AMS or decreased mental status
- No electrical activity on ECG
- No heart tones on auscultation

Differential

- See Reversible Causes below
- Infection/Sepsis
- Hypovolemia
- Cardiac arrest
- Hemorrhage

YES▶

Contact VAD coordinator:


- As quickly as possible for troubleshooting and treatment advice, but do not delay emergency treatment
- Follow patient specific emergency plan if present

Rapid assessment Check for signs of life Assess for adequate perfusion

> Criteria for Death / No Resuscitation **Review DNR / MOST Form**

Decomposition Rigor mortis Dependent lividity Blunt force trauma Injury incompatible with life Extended downtime with asystole

Do not begin resuscitation

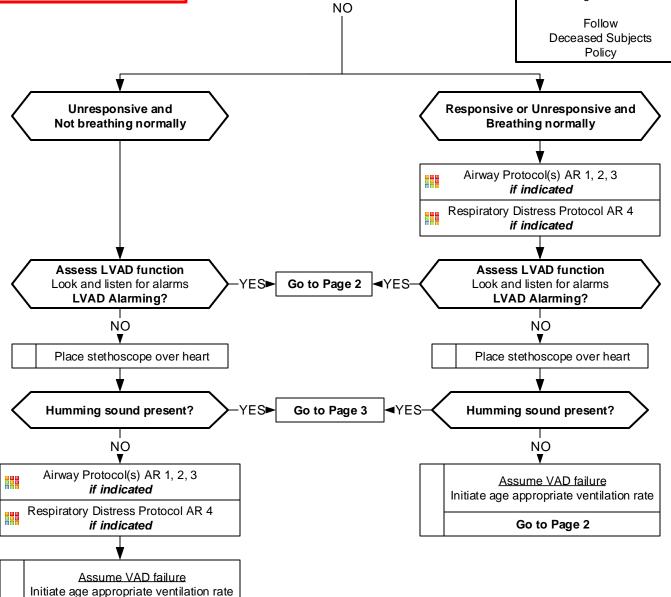

Go to Page 2



Mechanical Circulatory Support LVAD, RVAD, and Bi-VAD


- **SAMPLE**
- Bridge to transplant
- Destination therapy
- Estimated downtime
- LVAD, RVAD, Bi-Vad, TAH
- DNR, MOST, or Living Will
- Contact with LVAD coordinator

Signs and Symptoms

- Unconsciousness
- **Pulseless**
- Apneic
- Poor capillary refill / skin color
- AMS or decreased mental status
- No electrical activity on ECG
- No heart tones on auscultation


Differential

- See Reversible Causes below
- Infection/Sepsis
- Hypovolemia
- Cardiac arrest
- Hemorrhage

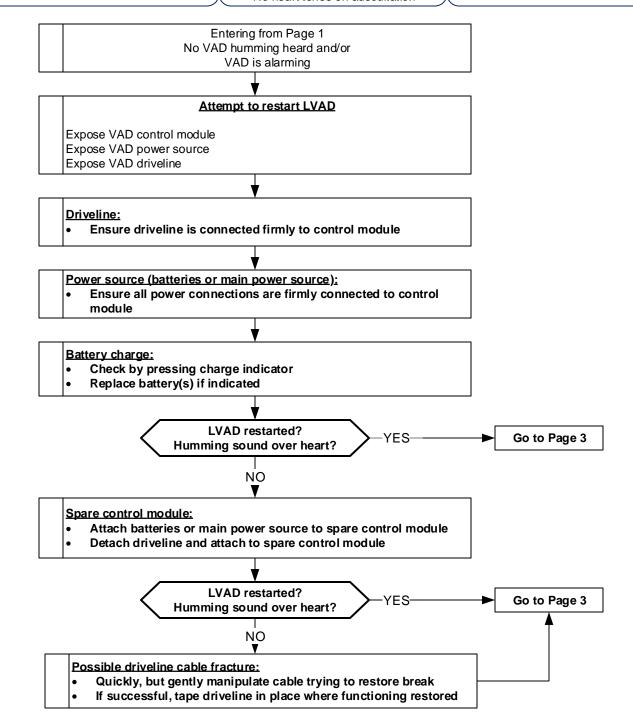



Mechanical Circulatory Support LVAD, RVAD, and Bi-VAD

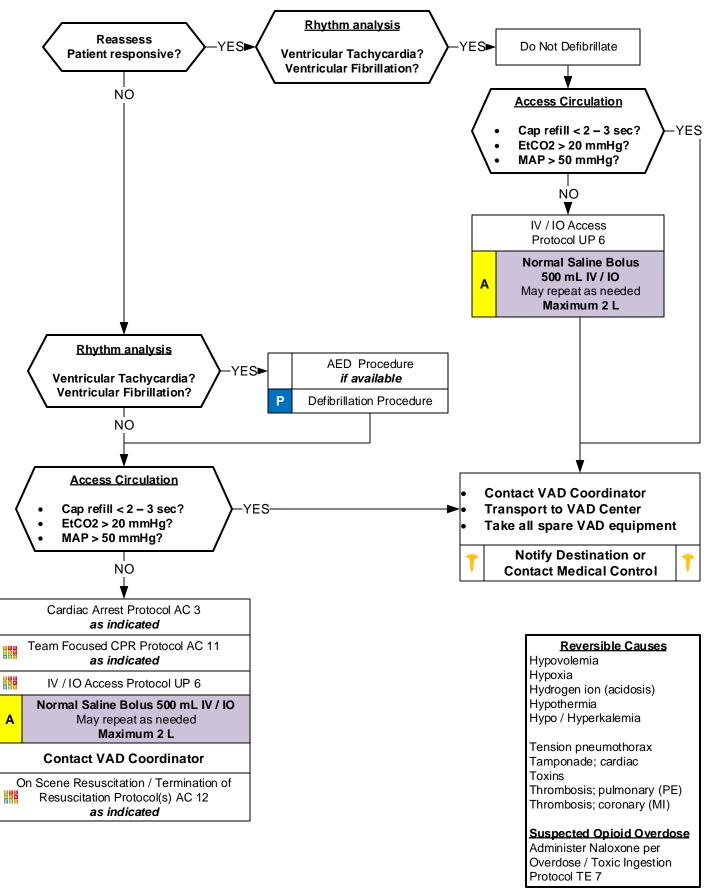



Left Ventricular Assist Device LVAD Unresponsive or AMS

Pearls

- Recommended exam: Mental status, skin color, capillary refill, peripheral pulses, blood pressure.
- Assessment of blood flow and perfusion status:

Optimal BP attained by manual BP and Doppler.

Automated BP devices can measure a BP in about 50% of attempts and is not reliable to assess perfusion

A MAP of ≥ 60 mmHg is adequate for most LVAD patients.

Skin color, skin temperature, capillary refill

Mechanical Circulatory Support devices:

LVAD - Left Ventricular Assist Device

RVAD - Right Ventricular Assist Device

BiVAD - Biventricular Ventricular Assist Device

TAH - Total Artificial Heart

Reasons for use:

Bridge therapy - patients awaiting transplant or anticipated recovery.

Destination therapy - advanced heart failure, not candidate for transplant, and will live rest of life with device.

Pump type and assessing pulses:

Pulsatile flow pumps – older units, not commonly in use now, but generate blood flow with a pulsatile flow and patient will have a palpable pulse.

Continuous flow pumps – majority of pumps now used and create blood flow in a continuous stream, no pulsatile flow, so patient will not have a palpable pulse.

Most devices are implanted inside the chest and have an internal pump, a driveline connected from the pump to the controller unit, and a power source consisting of batteries and electrical cord for receptacles.

Common complications:

Disconnection of power supply, either battery disconnect, or electrical cord to receptacle disconnection.

Driveline failure or disconnection from controller unit.

Controller failure

Blood clot formation, acute stroke, and bleeding (mucosal and gastrointestinal most common sites) Infection

Abnormal heart rhythm:

Pseudo-PEA: Normal cardiac electrical activity in a patient who is alert and well perfused with no palpable pulse. Tachyarrhythmias are usually well tolerated.

End Tidal CO2 (EtCO2)

If EtCO2 is < 10 mmHg, improve chest compressions. Goal is ≥ 20 mmHg.

If EtCO2 spikes, typically > 40 mmHg, consider Return of Spontaneous Circulation (ROSC)

Transcutaneous Pacing:

Pacing is NOT effective in cardiac arrest and pacing in cardiac arrest does NOT increase chance of survival